

# J-CLASS

## SandHandler

### 6" High Capacity Pumps

Ideal for farm, home, irrigation, industry, municipal and commercial applications, equipped with the power, performance and reliability you expect from Franklin Electric.

Flow ratings of 50, 75, 100 and 125 gpm with TDH up to 1200 ft.

Horsepower ranges from 1-1/2 to 40 hp.

#### Features:

- Heavy-duty stainless steel discharge head and motor bracket
- Stainless steel shaft, shell, intake screen and cable guard provides corrosion resistance and longer pump life
- Glass-filled nylon impeller stage assemblies provide exceptional strength and durability
- Ceramic shaft sleeve and rubber discharge bearing minimize bearing wear and shaft misalignment
- 3" NPT tapping in heavy-duty stainless steel discharge head
- Modular motor bracket enabling 4" or 6" motor mount for 5-10 horsepower units



**Franklin Electric**

The Company You Trust Deep Down

## Ordering Information

### 6" Pump Ends:


1.5 - 25 HP 6" PUMP ENDS							
GPM	HP	STAGES	MOTOR FIT	ORDERING INFO.		LENGTH	WT.
				MODEL NO.	ORDER NO.	PEA	
50	1.5	3	4"	50JS15S6-PE	94815003	13.51	30
	2	4	4"	50JS2S6-PE	94815004	15.13	31
	3	5	4"	50JS3S6-PE	94815005	16.76	32
	5	8	4" & 6"	50JS5S6-PE	94815008	21.63	36
	7.5	11	4" & 6"	50JS7S6-PE	94815011	26.51	40
	10	15	4" & 6"	50JS10S6-PE	94815015	32.94	46
75	3	3	4"	75JS3S6-PE	94817503	13.51	30
	5	5	4" & 6"	75JS5S6-PE	94817505	16.76	32
	7.5	7	4" & 6"	75JS7S6-PE	94817507	20.01	35
	10	9	4" & 6"	75JS10S6-PE	94817509	23.26	38
	15	13	6"	75JS15S6-PE	94817513	29.76	43
	20	17	6"	75JS20S6-PE	94817517	36.19	48
100	25	23	6"	75JS25S6-PE	94817523	46.00	54
	5	3	4" & 6"	100JS5S6-PE	94810003	14.62	30
	7.5	5	4" & 6"	100JS7S6-PE	94810005	18.51	32
	10	6	4" & 6"	100JS10S6-PE	94810006	20.49	34
	15	9	6"	100JS15S6-PE	94810009	26.31	38
	20	13	6"	100JS20S6-PE	94810013	34.07	43
125	25	16	6"	100JS25S6-PE	94810016	39.94	47
	5	2	4" & 6"	125JS5S6-PE	94812502	12.94	29
	7.5	3	4" & 6"	125JS7S6-PE	94812503	15.05	30
	10	4	4" & 6"	125JS10S6-PE	94812504	17.13	31
	15	7	6"	125JS15S6-PE	94812507	23.37	35
	20	9	6"	125JS20S6-PE	94812509	27.54	38
	25	11	6"	125JS25S6-PE	94812511	31.70	40
	30	13	6"	125JS30S6-PE	94812513	35.87	43
40	18	6"	125JS40S6-PE	94812518	46.27	48	

**Note:** All dimensions are in inches. Discharge is 3" NPT. Maximum diameter across cable guard is 5.5" on all models. Weight in pounds.


# 6" High Capacity Pumps

## Performance Curves:


### 50 gpm:

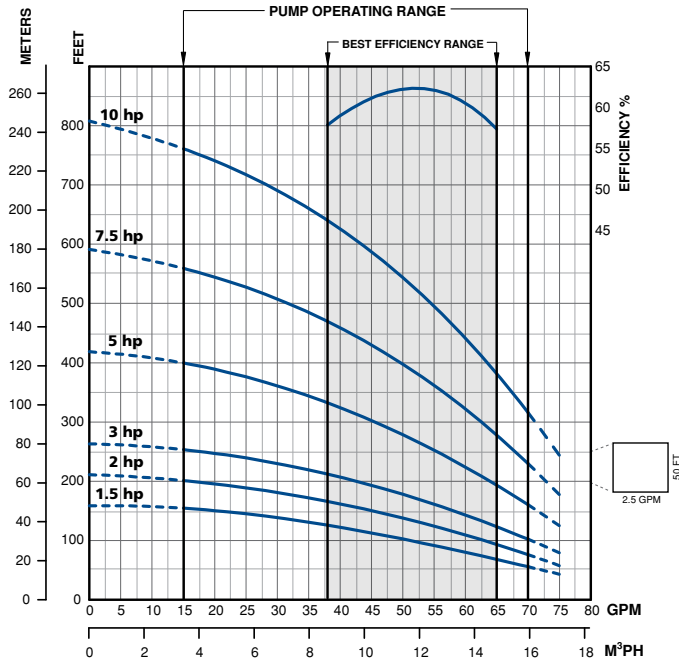


### 75 gpm:

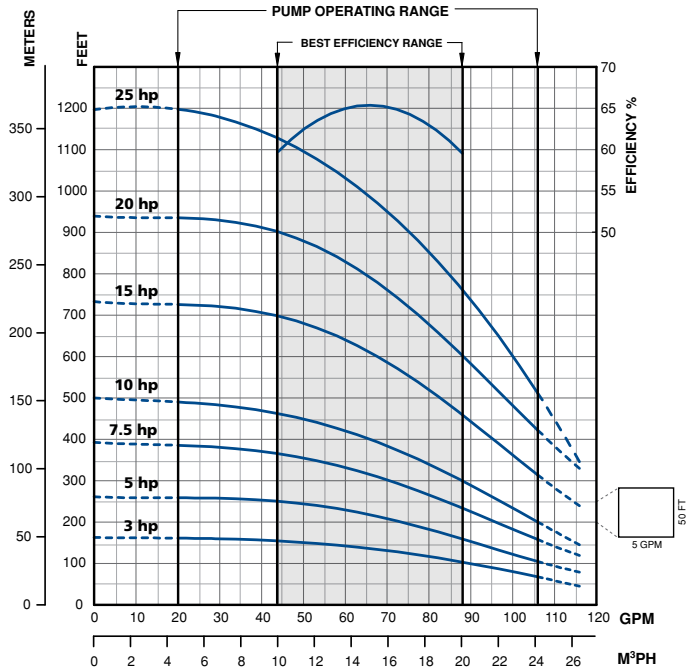

### 100 gpm:

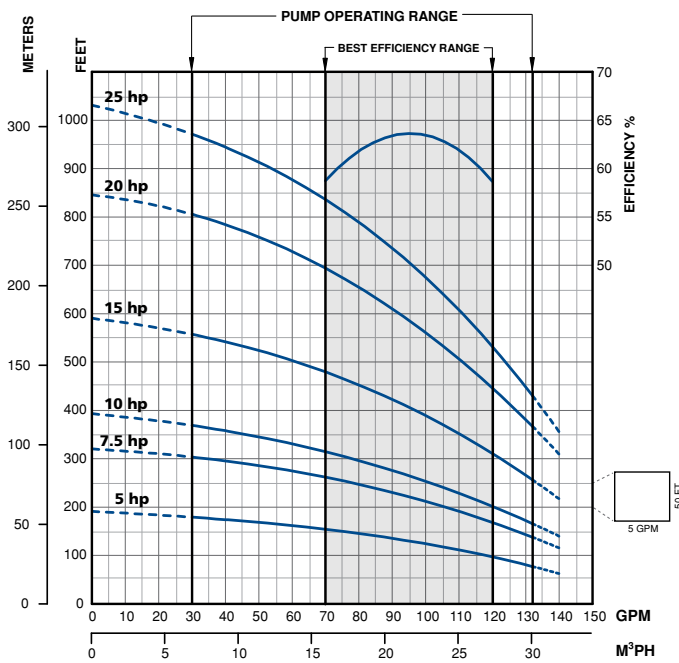

### 125 gpm:

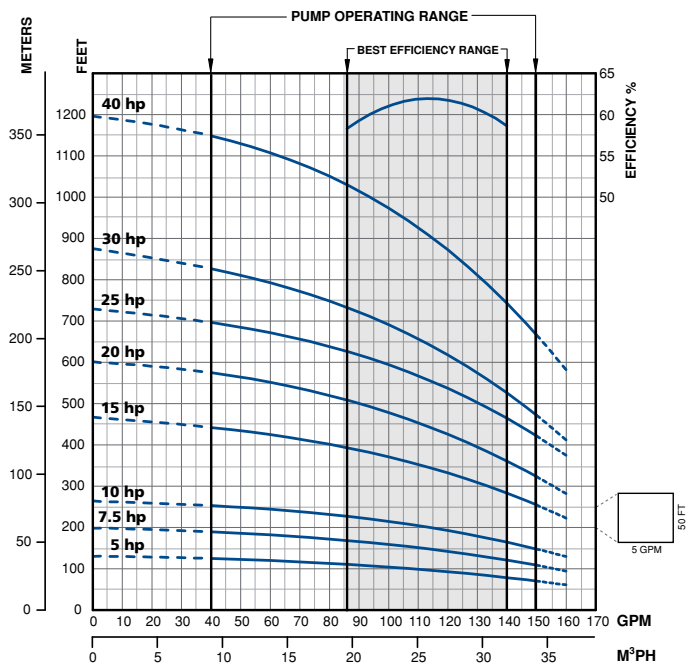

**Franklin Electric**  
The Company You Trust Deep Down



**Franklin Electric**

400 East Spring Street, Bluffton, IN 46714

Tel: 260.824.2900 • Fax: 260.824.2909

[www.franklin-electric.com](http://www.franklin-electric.com)